

7.2 Panel

Commercial Roof and Wall Panel




Symmetrical and strong for contemporary design.

Available in 24 and 26 ga., our 7.2 panel is a great choice for both commercial and industrial applications. This exposed fastener panel can be installed horizontally or vertically. It's symmetrical, repeating pattern gives the classic deep-rib look that architects love, and is great for canopies and carports.

7.2 panel is available in both 36" and 28.8" coverage.

- Excellent load and spanning strength.
- Available in 36" and 28.8" coverage.
- Ideal for canopies, carports, and low-pitch commercial roofs.

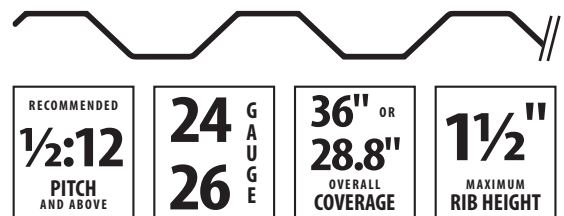

WWW.CENTRALSTATESMFG.COM

Copyright © 2020, Central States Manufacturing, Inc., All Rights Reserved.
CentralGuard® is a trademark of Central States® Manufacturing, Inc.
Galvalume® is a registered trademark of BIEC International, Inc.

C E FLYR_72_200620

Choose CentralGuard® for the best protection and a lifetime warranty.

CentralGuard is our specific combination of everything that goes into making the highest-quality metal panels. Available on our Prime panels, the CentralGuard name is a guarantee that you have the best protection and a lifetime paint warranty.

Choose Prime for the perfect balance of fade protection, rust blocking, and dent resistance. Upgrade to Ultra for projects that demand the ultimate dent resistance.

	<div>OUR BEST SELLER!</div> <div>PRIME CentralGuard</div>	<div>ULTIMATE DENT RESISTANCE</div> <div>ULTRA CentralGuard</div>
FADE PROTECTION		
Paint Warranty	LIFETIME	
Paint Thickness	THICKER 1.0 mil	
Fade Warranty	30-YEAR	
Fade Protection	✓✓	
RUST BLOCKING		
Advanced Rust Blocking	✓	✓
Perforation Warranty	20-YEAR	20-YEAR
Substrate Thickness	1.60 mil	1.60 mil
DENT RESISTANCE		
Advanced Dent Resistance	✓✓	✓✓
Steel Thickness	THICK	THICKEST
Steel Gauge	26 ga.	24 ga.



Find more information at
centralstatesmfg.com

MINIMUM SPECIFICATIONS FOR PRIME PAINTED PANELS

GAUGE

26 ga. | 24 ga.

STEEL THICKNESS

26 ga. 0.0185" | 24 ga. 0.023"

PAINT THICKNESS

Top coat paint: .70 mil
Top coat primer: .30 mil
Bottom coat backer: .35 mil
Bottom coat primer: .35 mil

TOTAL THICKNESS

26 ga. 0.0202" | 24 ga. 0.0247"

RUST PROTECTANT SUBSTRATE

Galvalume® AZ50

STEEL STRENGTH

80,000 PSI (26 ga.) | 50,000 PSI (24 ga.)

PAINT SYSTEM

SMP

WARRANTY

Lifetime limited paint adhesion
30-yr. chalk and fade
20-yr. Galvalume perforation

COLOR AVAILABILITY

36" COVERAGE PRIME

- Brilliant
- Burnished Slate
- Charcoal
- Galvalume
- Gray
- Light Stone

36" COVERAGE ULTRA

- Galvalume

28.8" COVERAGE PRIME

- Brilliant
- Brown
- Burgundy
- Burnished Slate
- Colony
- Copper Metallic
- Crimson
- Charcoal
- Desert
- Fern
- Gallery
- Galvalume
- Gray
- Hawaiian
- Hunter
- Light Stone
- Polar
- Rustic
- Tan