Central Shield™ 150

Color Selection Tool

24 GAUGE
26 GAUGE



Burnished Slate
26ga*

Charcoal
26ga*

Smoke
Fluropon® 70% PVDF
24ga

Slate Gray
Fluropon® 70% PVDF
24ga

Gray
26ga*

Ash
Fluropon® 70% PVDF
24ga

Brite
Fluropon® 70% PVDF
24ga

Brilliant
26ga*

Fern
26ga*

Forest
26ga*

Hunter
26ga*

Evergreen
Fluropon® 70% PVDF
24ga

Colony
26ga*

Rustic
26ga*

Autumn
Fluropon® 70% PVDF
24ga

Gallery
26ga*

Brown
26ga*

Black
26ga*

Matte Black
Fluropon® 70% PVDF
24ga | 26ga

Sand
Fluropon® 70% PVDF
24ga*

CENTRAL STATES MANUFACTURING, INC.
METAL BUILDING COMPONENTS

centralstatesco.com

*24 gauge available upon request..
†Copper Metallic panels must be installed in the same direction. See directional arrows or stickers provided on your panels. Color variation between orders is normal and not cause for rejection.
‡Weathering and appearance variation, including color, sheen, and spangle, is common in non-painted materials and is not a cause for rejection. For consistent appearance, choose a paint-finished product.
Colors on this chart are close representations of actual metal color, limited by printing and viewing conditions. Color matching optimized for outdoor viewing.
Customers should view an actual material sample before making a final color selection.
Contact your sales representative for accurate pricing.

SHERWIN-WILLIAMS Coil Coatings

CENTRALGUARD®

Choose CentralGuard® for the best protection and a lifetime warranty.

Copper Metallic†
26ga*

Galvalume®‡
24ga | 26ga

Terratone
Fluropon® 70% PVDF
24ga

Tudor
Fluropon® 70% PVDF
24ga

Bronze
Fluropon® 70% PVDF
24ga

Dark Bronze
Fluropon® 70% PVDF
24ga

DESIGNED FOR BEAUTY, ENGINEERED FOR PERFORMANCE

The **Central Shield™ 150** snap-lock standing seam panel delivers the ideal balance of enhanced durability, refined appearance, and simple installation.

This standing seam panel system combines a 1.5-inch rib height with a precision-engineered clip system, providing superior structural integrity, thermal movement capability, and long-term weather resistance. The snap-lock design eliminates the need for field seaming with specialized equipment, resulting in a fast and efficient installation, without compromising performance.

- Concealed fastener clip system eliminates exposed fasteners, reducing leak risk and minimizing ongoing maintenance..
- Clip attachment system allows the panel to expand and contract naturally with temperature changes, reducing stress on the roof system and minimizing oil canning caused by thermal changes.
- Raised 1.5-inch seams provide excellent water-shedding performance.
- Designed for durability in high wind, rain, and seasonal conditions.
- Manufactured from high-quality 26 gauge and 24 gauge steel with some of the highest steel quality specifications in the industry.
- SMP and Fluropon/Kynar 500/70% PVDF paint options from industry leader **Sherwin-Williams.**
- Full range of color-matched trim available.

	26ga PRIME CentralGuard	**24ga** PRIME CentralGuard
FADE PROTECTION		
Paint Warranty	LIFETIME	LIFETIME
Paint Thickness	1.0 mil	1.0 mil
Fade Warranty	30-YEAR	30-YEAR
Fade Protection	✓	✓
RUST BLOCKING		
Adv. Rust Blocking	✓	✓
Perforation Warranty	50-YEAR	50-YEAR
Substrate Thickness	1.60 mil	1.60 mil
DENT RESISTANCE		
Adv. Dent Resistance	✓	✓
Steel Thickness	THICK	THICKEST

Central Shield™ 150



Upgrade to a panel system that combines strength, speed, and style—all in one solution.

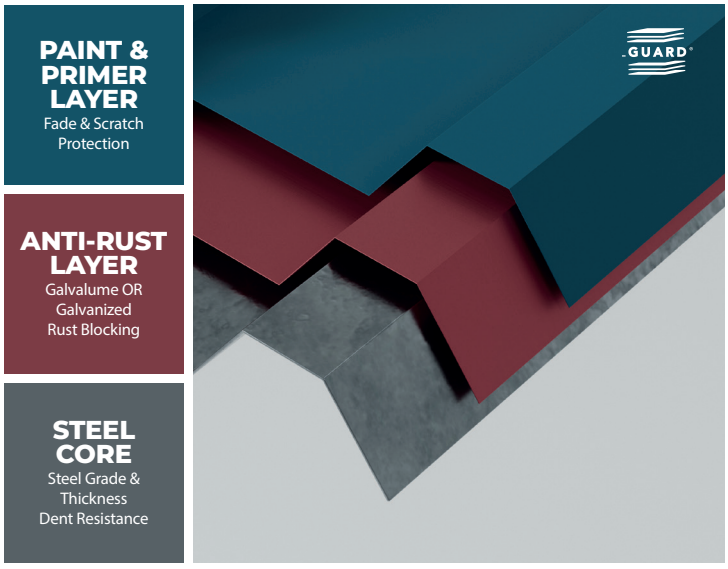

LAYERS OF PROTECTION

Choose the right level of protection for your project. Our panels feature three distinct layers of protection available in varying thicknesses so you can select your perfect combination of performance, price, and protection.

PRIME

Perfect balance of protection.

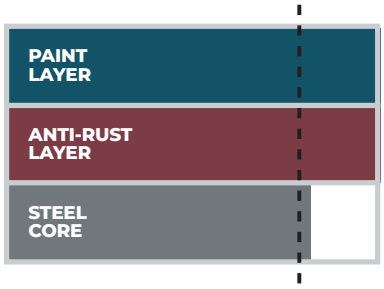

CENTRALGUARD®

CENTRAL STATES® MANUFACTURING, INC.
METAL BUILDING COMPONENTS

Copyright © 2026, Central States Manufacturing, Inc., All Rights Reserved.
CentralGuard® is a trademark of Central States® Manufacturing, Inc.
Galvalume® is a registered trademark of BIEC International, Inc.
Sherwin-Williams® and Fluropon® are registered trademarks of SWIMC LLC.